



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04M 11/06, H04L 5/06, 27/26	A1	(11) International Publication Number: WO 99/29097 (43) International Publication Date: 10 June 1999 (10.06.99)
(21) International Application Number: PCT/US98/25259 (22) International Filing Date: 25 November 1998 (25.11.98) (30) Priority Data: 08/982,400 2 December 1997 (02.12.97) US (71) Applicant: ROCKWELL SEMICONDUCTOR SYSTEMS, INC. [US/US]; 4311 Jamboree Road, Newport Beach, CA 92660-3095 (US). (72) Inventors: ANDERTON, David, O.; 18 Sillero, Rancho Margarita, CA 92688 (US). ELDUMIATI, Ishmail, I.; 17 Aguilar, Irvine, CA 92614 (US). GRONEMEYER, Steven, A.; 6908 Wilton Drive, N.E., Cedar Rapids, IA 52402 (US). HARMER, Don, L.; 634 S. Frontier Court, Anaheim, CA 92807 (US). HENDERSON, P., Michael; 12450 Butler Way, Tustin, CA 92782 (US). KO, Kenneth, D.; 2956 Saber Drive, Clearwater, FL 33759 (US). PESHKIN, Joel, D.; 28 Del Trevi, Irvine, CA 92606 (US). RAHAMIM, Raphael; 2717 North Vista Court, Orange, CA 92867 (US). STUBBE, Frederic, M.; 54 Del Ventura, Irvine, CA 92606 (US). WALLEY, John, S.; 25751 Brookmont, Lake Forest, CA 92630 (US). WALLEY, Kenneth, S.; 19262 Shadow Oak Drive, Portola Hills, CA 92679 (US). WAN, Yongbing; 33 Vetrina, Irvine, CA 92606 (US). ZURANSKI, Edward,		S.; 1313 Crescent Drive, Largo, FL 33770 (US). HAQUE, Jamal; 12701 N. 50th Street #E-11, Tampa, FL 33617 (US). YANG, Ganning; 2 Pompeii, Irvine, CA 92606 (US). (74) Agents: ZIEBERT, Joseph, N. et al.; Foley & Lardner, 777 East Wisconsin Avenue, Milwaukee, WI 53202-5367 (US). (81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: CONSTANT ENVELOPE MODULATION FOR SPLITTERLESS DSL TRANSMISSION		
(57) Abstract <p>A digital subscriber line (DSL) communication system that utilizes the high frequency band of a standard telephone line does not require the use of a plain old telephone service (POTS) splitter in the resident's home, which provided isolation between the POTS frequency band (0 to 4 kHz) and the DSL frequency band. Digital signal processing techniques are utilized to adapt to varying subscriber line conditions due to POTS telephone equipment. The digital signal processing techniques eliminate the need for a splitter by reducing susceptibility to distortion due to varying subscriber line characteristics. The digital subscriber line modem utilizes constant envelope modulated signals and frequency division multiplexing, where the constant envelope modulations lessens the intermodulation distortion products due to DSL signals that are transmitted by the modem and which may result in audible noise at the POTS telephone equipment due to non-linearities of the POTS telephone equipment.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**CONSTANT ENVELOPE MODULATION FOR SPLITTERLESS
DSL TRANSMISSION**

Cross Reference to Related Patent Applications

The present application is related to U.S.
5 patent application Serial No. unassigned, Foley & Lardner
attorney docket number 071815/0144, filed October 3,
1997, by Henderson, Ko, Zuranski, Hague, Patravali,
Rodriguez, Souders, and Tzouris, and entitled,
"Splitterless Digital Subscriber Communication System";
10 and U.S. patent application Serial No. 08/982,421, Foley
& Lardner attorney docket number 071815/0178, filed
November 26, 1997, by Anderton, Eldumati, Gronemeyer,
Harmer, Henderson, Ko, Peshkin, Rahamim, Stubbe, J.
Walley, S. Walley, Wan, and Zuranski, and entitled
15 "Modulation Switching For DSL Signal Transmission".

Field of the Invention

The present invention relates to a modulation
technique for a communication system. In particular, the
present invention relates to a splitterless communication
20 system utilizing constant envelope modulation.

Description of the Related Art

Explosive growth of the internet and the
worldwide web is driving a need for increased communication
data rates. In the corporate world, the need for high-
25 speed access or data rates is met by dedicated high-speed
links (such as T1/E1 frame relays or OC1 ATM systems) from
the company to an internet access provider. Users in the
company typically utilize a local area network (LAN) to
gain access to an internet access router that is coupled to
30 the high-speed link. Unfortunately, home users of the
internet do not often have access to a high-speed link and
must rely on a standard analog or plain old telephone
service (POTS) subscriber line.

The need for high-speed access to the home is ever increasing due to the increased popularity of telecommuting and the availability of information, data, programs, entertainment, and other computer applications on the worldwide web and the internet. For example, designers of web technology are constantly developing new ways to provide sensory experiences, including audio and video, to users of the web (web surfers). Higher-speed modems are required so the home user can fully interact with incoming web and communication technologies.

Although designers of modems are continuously attempting to increase data rates, analog or POTS line modems are presently only able to reach data rates of up to 56 kilobits per second (Kbps). These conventional analog modems transmit and receive information on POTS subscriber lines through the public switched telephone network (PSTN). The internet access provider is also coupled to the PSTN and transmits and receives information through the PSTN to the subscriber line.

Some home users have utilized ISDN equipment and subscriptions to obtain up to 128 Kbps access or data rates by the use of two data channels (B channels) and one control channel (D channel). ISDN equipment and subscriptions can be expensive and require a dedicated subscriber line. Neither ISDN modems nor conventional analog modems are capable of providing 256 Kbps or higher access between the home and the internet.

A variety of communication technologies are competing to provide high-speed access to the home. For example, asymmetric digital subscriber lines (ADSL), cable modems, satellite broadcast, wireless LANs, and direct fiber connections to the home have all been suggested. Of these technologies, the asymmetric digital subscriber line can utilize the POTS subscriber line (the wire currently being utilized for POTS) between the home user (the residence) and the telephone company (the central office).

DSL networks and protocols were developed in the early 1990's to allow telephone companies to provide video-on-demand service over the same wires which were being used to provide POTS. DSL technologies include discrete
5 multitone (DMT), carrierless amplitude and phase modulation (CAP), high-speed DSL (VDSL), and other technologies. Although the video-on-demand market has been less than originally expected, telephone companies have recognized the potential application of DSL technology for internet
10 access and have begun limited offerings.

DSL technology allows telephone companies to offer high-speed internet access and also allows telephone companies to remove internet traffic from the telephone switch network. Telephone companies cannot significantly
15 profit from internet traffic within the telephone switch network due to regulatory considerations. In contrast, the telephone company can charge a separate access fee for DSL services. The separate fee is not as restricted by regulatory considerations.

20 With reference to Figure 1, a conventional asymmetric DSL (ADSL) system 10 includes a copper twisted pair analog telephone subscriber line 12, an ADSL modem 14, an ADSL modem 16, a band splitter 18, and a band splitter 20. Line 12 is a POTS local loop or wire connecting a
25 central office 32 of the telephone company and a user's residence 22.

ADSL modem 14 is located in user's residence 22 and provides data to and from subscriber line 12. The data can be provided from line 12 through modem 14 to various
30 equipment (not shown) coupled to modem 14. Equipment, such as, computers, network devices, servers, or other devices, can be attached to modem 14. Modem 14 communicates across line 12 with a data network (not shown) which is coupled to modem 16. ADSL modem 16 receives signals from line 12 and
35 transmits signals to the data network. The data network

can be coupled to other networks (not shown), including the internet.

At least one analog telephone 26, located in residence 22, can be coupled to subscriber line 12 through
5 splitter 20 for communications across line 12 with telephone switch network 28. Telephone 26 and telephone switch network 28 are conventional systems well-known in the art. Alternatively, other analog equipment, such as, facsimile machines, POTS modems, answering machines, and
10 other telephonic equipment, can be coupled to line 12 through splitter 20.

System 10 requires that band splitter 18 and band splitter 20 be utilized to separate higher frequency DSL signals and lower frequency POTS signals. For example,
15 when the user makes a call from residence 22 on telephone 26, lower frequency signals (under 4 kilohertz (kHz)) are provided through band splitter 20 to subscriber line 12 and through band splitter 18 to telephone switch network 28. Band splitter 18 prevents the lower frequency POTS signals
20 from reaching DSL modem 16. Similarly, band splitter 20 prevents any of the POTS signals from reaching modem 14.

Figure 2 shows the separate frequency bands for POTS signals and DSL signals. The POTS signals (signals transmitted between telephone 26 and telephone switch
25 network 28) utilize a first frequency band 210, uplink DSL signals (signals transmitted from modem 14 to modem 16) utilize a second frequency band 220 that is higher in frequency than the first frequency band 210, and downlink DSL signals (signals transmitted from modem 16 to modem 14)
30 utilize a third frequency band 230 that is higher in frequency than the second frequency band 220.

Referring back to Figure 1, ADSL modem 16 and DSL modem 14 communicate higher frequency ADSL signals across subscriber line 12. The higher frequency ADSL signals are
35 prevented from reaching telephone 26 and telephone switch network 28 by band splitters 20 and 18, respectively.

Splitters 18 and 20 can be passive analog filters or other devices which separate lower frequency POTS signals (below 4 kHz) from higher frequency ADSL signals (above 50 kHz).

5 The separation of the POTS signals and ADSL signals by splitters 18 and 20 is necessary to preserve POTS voice and data traffic and ADSL data traffic. More particularly, splitters 18 and 20 can eliminate various effects associated with POTS equipment which may affect the transmission of ADSL signals on subscriber line 12. For
10 example, the impedance of subscriber line 12 can vary greatly as at least one telephone 26 is placed on-hook or off-hook. Additionally, the changes in impedance of subscriber line 12 can change the DSL channel characteristics associated with subscriber line 12. These
15 changes in characteristics can be particularly destructive at the higher frequencies associated with ADSL signals (e.g., from 30 kHz to 1 megahertz (MHz) or more).

Additionally, splitters 18 and 20 isolate subscriber line or telephone wiring within residence 22.
20 The impedance of such wiring is difficult to predict. Further still, the POTS equipment, such as, telephone 26, provides a source of noise and nonlinear distortion. Noise can be caused by POTS voice traffic (e.g., shouting, loud laughter, etc.) and by POTS protocol, such as, the ringing
25 signal. The nonlinear distortion is due to the nonlinear devices included in conventional telephones. For example, transistor and diode circuits in telephone 26 can add nonlinear distortion and cause hard clipping of DSL signals. Telephone 26 can further generate harmonics which
30 can reach the frequency ranges associated with the DSL signals. The nonlinear components can also demodulate DSL signals to cause a hiss in the audio range which affects the POTS.

Conventional ADSL technology has several
35 significant drawbacks. First, the costs associated with ADSL services can be quite large. Telephone companies

incur costs related to central office equipment (ADSL modems and ADSL network equipment) and installation costs associated with the ADSL modems and network equipment. Residential users incur subscriber equipment costs (DSL modems) and installation costs.

Installation costs are particularly expensive for the residential user because trained service personnel must travel to residence 22 to install band splitter 20 (Figure 1). Although band splitter 18 must be installed at the central office 32, this cost is somewhat less because service personnel can install band splitter 18 within central office 32. Also, at office 32, splitter 18 can be included in ADSL modem 16. However, in residence 22, splitter 20 must be provided at the end of subscriber line 12.

Additionally, ADSL equipment for residence 12, such as, modem 14, is expensive because the most complex component of system 10 (e.g., the high-speed receiver) is located at residence 22. High-speed transmissions are generally received within residence 22, and lower-speed transmissions are received by central office 32. In most internet applications, larger amounts of data are requested by the residential user rather than by the internet source. Receivers are typically much more complex than transmitters. These high-speed receivers often receive data at rates of over 6 Mbps.

ADSL equipment can be subject to cross-talk noise from other subscriber lines situated adjacent to subscriber line 12. For example, subscriber lines are often provided in a closely contained bundle. The close containment can cause cross-talk from other subscriber lines to be placed on subscriber line 12. Modem 14 must compensate for cross-talk noise.

Thus, there is a need for a digital subscriber line (DSL) communication system which does not require the use of a splitter in the residence. Further, there is a

need for a communication system which allows a DSL modem to be connected directly to the subscriber line similar to the use of a conventional analog modem. Even further there is a need for a DSL modem that provides a modulation technique that results in less intermodulation distortion products for telephones that communicate over the POTS frequency band. The intermodulation distortion products can cause audible noise at the telephones, which is undesirable.

Summary of the Invention

10 The present invention relates generally to a digital subscriber line modem adapted to be coupled directly to a subscriber line. The modem is capable of simultaneous access to the subscriber line with other telephone equipment operating in a frequency band below a predetermined frequency value. The modem includes a modulator that provides a constant envelope modulation for DSL signals that are transmitted over the subscriber line, and that are sent within a frequency band above the predetermined frequency value.

20 The present invention also relates to a telephone communication system that includes a subscriber line between a telephone central office and a remote location. The remote location is capable of transmitting and receiving both POTS signals within a first frequency band and DSL signals within a second frequency band over the subscriber line at the same time without using a splitter at the remote location. The system includes a modulator connected to the subscriber line, where the modulator is configured to provide a constant envelope modulation for the DSL signals that are transmitted over the subscriber line in the second frequency band, so as to lessen an amount of interference with the POTS signals the first frequency band created due to non-linearities that cause demodulation of the DSL signals into the first frequency band.

35

The present invention further relates to a method of providing simultaneous communication over a telephone subscriber line. The simultaneous communication includes at least a first signal in a first frequency band that is either being sent to or received from a telephone, and a second signal in a second frequency band that is higher than the first frequency band, the second signal being sent from a modem. The method includes a step of providing, by the modem, a constant envelope modulation for the second signal in the second frequency band. The constant envelope modulation limits an amount of audible noise heard at the telephone due to a nonlinearity in the telephone that demodulates the second signal into the first frequency band.

Brief Description of the Drawings

The invention will be further described with reference to the accompanying drawings, wherein like numerals denote like elements, and:

Figure 1 is a schematic block diagram of a conventional ADSL communication system;

Figure 2 is a frequency plot of a POTS frequency band, an uplink ADSL band, and a downlink DSL band used in a conventional ADSL communication system;

Figure 3 is a block diagram of a splitterless communication system that utilizes a DSL modem according to the present invention; and

Figure 4 is a block diagram of an MSK modulator used in the DSL modem according to the present invention;

Figure 5 is a diagram showing the relationship of an I-channel and a Q-channel in an MSK system;

Figure 6A is a timing diagram showing eight samples of a "+1" PAM symbol using a sinusoidal waveform;

Figure 6B is a timing diagram showing eight samples of a "-1" PAM symbol using a sinusoidal waveform;

Figure 7A shows a first sine/cosine lookup table that can be used according to the system and method of the invention;

5 Figure 7B shows a second sine/cosine lookup table that can be used according to the system and method of the invention;

Figure 8 is a block diagram of a first embodiment of a DSL modem according to the invention; and

10 Figure 9 is a block diagram of a second embodiment of a DSL modem according to the invention.

Detailed Description of the Preferred Embodiments

U.S. Patent Application Serial Number unassigned, entitled "Splitterless Digital Subscriber Communication System", Foley & Lardner attorney docket number
15 071815/0144, filed October 3, 1997 by Henderson et al., and assigned to Rockwell International Corporation, and incorporated in its entirety herein by reference, discloses a splitterless digital subscriber line communication system that allows for both DSL signals and for standard telephone
20 signals (e.g., sent over the POTS) to coexist without much interference between these two signals. In conventional communication systems that provide for DSL and POTS transmission of voice and/or data, a POTS splitter provides hardware isolation between the POTS frequency band (e.g.,
25 0 to 4 kHz) and the DSL frequency band (e.g., 30 kHz to 1 MHz).

With the POTS splitter 20 in a conventional system, as seen in Figure 1, the telephone 26 in residence
22 does not receive the DSL signals that are on subscriber
30 line 12. The DSL signals are prevented from appearing on the ring and tip lines of the telephone circuit 36 in residence 22. Also, the POTS splitter 20 provides isolation for an DSL modem 14, so that the POTS signals that are on subscriber line 12 are prevented from being
35 received by the DSL modem 14.

-10-

Splitter 20 is three-port device including port 22A coupled to telephone loop or line 12, a port 22B coupled to telephone wiring 36 inside residence 22, and a port 22C coupled to DSL modem 14. Splitter 20 communicates signals at port 22A at the full bandwidth of subscriber line 12 (e.g., the full bandwidth capability of line 12). Splitter 22 low pass filters any signals communicated through port 22B to or from wiring 36. Thus, splitter 20 only allows POTS signals to pass through to devices, such as telephone 26. Splitter generally filters the signals provided through port 22B with a low pass filter tuned to a 0 to 4 kHz frequency range. Splitter 20 acts as a high pass filter for any signals communicated through port 22C.

As stated above, however, having a POTS splitter at the house or residence 22 requires a telephone company or the like to install such a device for the house, which is a time consuming and costly effort, due in part to the wiring operations necessary to install splitter 20 and the person-hours required to travel to each house desiring such a splitter 20.

Referring now to Figure 3, splitterless communication system 50 allows for both POTS transmissions and for DSL transmissions to coexist on the same twisted pair copper wires. A DSL modem 54 has the capability to change its data rate in accordance with POTS-related impairments that affect a DSL band, thereby allowing for successful data transmission over the DSL band. DSL modem 54 includes a digital signal processor that can provide for adjusting of automatic gain control, converging of equalizers, error processing, and/or line characterization. Based on the amount of POTS-impairments on the DSL band of the subscriber line 52, DSL modem 54 provides the highest data rate available, by constantly adjusting the data rate to reach the maximum data rate potential on the subscriber line. DSL modem 54 operates at a data rate lower than the

-11-

theoretical data rate of conventional DSL modems, but provides a faster data rate than current modems, even faster than conventional modems using 56FLEX™ or X2™ technology.

5 U.S. Patent Application Serial Number unassigned, Foley & Lardner attorney docket number 071815/0144, filed October 3, 1997 by Henderson et al. and entitled, "Splitterless Digital Subscriber Communication System",
10 discloses the use of Quadrature Amplitude Modulation (QAM) for the DSL signal transmission. Preferably, the QAM constellation size is a power-of-two value within the range from 4 to 256 constellation points. Additionally, Reed-Solomon encoding may also be utilized for the DSL transmission.

15 Other techniques are known for data transmission using DSL modems, such as Discrete Multitone (DMT). DMT allows for the splitting of the available DSL bandwidth into a number of subchannels. The subchannels are allocated a number of bits (0-8) per hertz in each 4 kHz
20 subchannel band, depending upon the signal-to-noise ratio experienced in the subchannel. DMT allows for the allocation of data so that the throughput of every subchannel is maximized. This data transmission technique is designed to maximize the transmission capability of the
25 DSL band.

However, in a splitterless communication system that allows for both POTS transmission and DSL transmission over a subscriber line, the particular modulation scheme utilized for the DSL transmission may have an adverse
30 impact on transmissions over the POTS band. In particular, since there is no hardware device (splitter) providing isolation between POTS signals and DSL signals, audible distortion due to intermodulation of DSL signals may appear at a telephone earpiece of a telephone at the house. Thus,
35 conventional DSL modulation techniques, such as QAM and

DMT, may be undesirable with regards to audible noise that is perceptible at the telephone earpiece.

For example, an DSL signal can have a first frequency component at 80 kHz and a second frequency component at 82 kHz. The DSL signal, when applied to a non-linearity in the communication system, produces a difference component at a frequency of $82 \text{ kHz} - 80 \text{ kHz} = 2 \text{ kHz}$, which is in the middle of the POTS frequency band. Of course, a typical DSL signal has a continuum of frequencies, which would result in difference components at a continuum of frequencies when the DSL signal interacts with a non-linearity in the system.

A non-linearity may appear in communication system 50 due to non-linearities in interface circuitry (not shown) of a telephone such as telephone 86. These nonlinearities may be due, for example, to transistors and diode circuits in the telephone. When an DSL signal appears at the interface circuitry, the non-linearities will cause intermodulation distortion products, such as the 2 kHz difference component described in the above example, to be picked up by a receiver microphone in the telephone. This "audible noise" is undesirable to a user of the telephone, and results in a hiss or background noise that may interfere with voice signals on the POTS frequency band of the subscriber line. Additionally, the audible noise may adversely interfere the transmission and reception of data signals within the POTS band. In particular, the non-linearities in the telephone act to demodulate the DSL signals so that they appear in the POTS frequency band, producing an undesirable result.

In the system and method according to the invention, the intermodulation product distortion is lessened to a great extent in the POTS frequency band by utilizing a modulation scheme that provides a lesser amount of intermodulation product distortion than conventional modulation schemes used for DSL transmission. As stated

above, the intermodulation product distortion is not a major problem for a conventional system having a hardware (POTS) splitter. However, for the system according to the invention that does not utilize a POTS splitter at a source/destination site (i.e., a house), the problem of intermodulation product distortion has been recognized by the inventors, and is dealt with in a manner that provides for substantially noise-free simultaneous data and/or voice communications over both the POTS band and the DSL band. By using a constant envelope modulation, intermodulation products appearing at or near the baseband frequency range are lessened to a great extent than by not using constant envelope modulation. Since the baseband frequency range is a part of the POTS band, this is a useful feature for simultaneous use of POTS transmission and DSL transmission over the same lines.

In the system and method according to the invention, a constant envelope modulation technique for upstream signal transmission over the DSL band is utilized. Constant envelope modulation corresponds to a non-amplitude modulation technique, such as frequency modulation or phase modulation. Phase modulation, such as phase shift keying (PSK), does modulate the envelope somewhat (at each phase transition in the modulated signal), but provides a sufficient enough "constant" envelope to be useful for a splitterless system for DSL and POTS traffic. Other types of phase modulation, such as continuous phase modulation, may be utilized to provide a substantially constant envelope with increased data rate transmission capability. System and application parameters can affect the meaning of the term constant envelope as used in the present application. For example, the constant envelope is preferably consistent enough so that intermodulation product distortion in the voice band does not annoy the user of the telephone.

-14-

In the system and method according to the invention, given that there are non-linearities that exist in the communications system and that cannot be entirely eliminated, a modulation technique for signals in the DSL band is used so only a small amount of interference affects standard voice and/or data transmissions over the POTS band. In the example given above with respect to an DSL signal having two frequency components at 80 kHz and 82 kHz, if amplitude modulation was used for the DSL signal, then a strong difference component would be generated by the non-linearities of the interface circuitry of a telephone on the POTS side. However, if constant envelope modulation was used instead, a lesser-sized difference component would be generated by the non-linearities of the interface circuitry of the telephone on the POTS side.

Such a use of constant envelope modulation has been provided for wireless communications, such as voice and/or data transmissions using satellites, where more than one signal passes through a transponder that may operate in a non-linear region under certain situations (e.g., fully-loaded transponder) operating at or near saturation. In such wireless systems, the use of constant envelope modulation provides for lesser suppression of the weaker signals as compared to stronger signals that are input to the transponder. In the system and method according to the invention, however, the use of constant envelope modulation provides for the lessening of intermodulation distortion products at a telephone on a POTS side of a wired system that does not have a splitter, where the telephone has non-linearities that cause intermodulation distortion to occur.

Another useful type of constant envelope modulation technique that can be utilized in the a DSL modem according to the invention is Minimum Shift Keying (MSK) modulation. MSK modulation is a continuous-phase frequency shift keying (FSK) modulation with a minimum modulation index (0.5) that will produce orthogonal

-15-

signaling. The details of MSK are presented in "Digital and Analog Communication Systems", by Leon W. Couch II, and are well known in the art.

5 A block diagram of one possible MSK modulation circuit for upstream DSL traffic that can be utilized in the system according to the invention is shown in Figure 4. In Figure 4, an MSK modulator 500 receives data from an I channel 505 and from a Q channel 510, with both channels receiving data in binary form (i.e., each bit is either "1" or "0"). I channel data is provided to a Binary-to-Pulse
10 Amplitude Modulator (PAM) circuit 520, and Q channel data is provided to a Binary-to-PAM circuit 530. Circuits 520, 530 each convert the binary data to corresponding PAM data, where a binary "1" is output as a "1", and where a binary
15 "0" is output as a "-1".

MSK modulator 500 also includes a Full-Wave Rectifier circuit 540, which converts an input sinusoid of the form $\sin(\omega T/2)$ into a full-wave-rectified signal. The full-wave-rectifier circuit 540 essentially performs an
20 Absolute Value function for any signal input to it. MSK modulator 500 encodes the I and Q channels into half-wave sinusoids, at a rate of $T/2$, where T = symbol rate.

MSK modulator 500 further includes a first multiplier 550 and a second multiplier 560. The first
25 multiplier 550 multiplies the PAM data of the binary-to-PAM circuit 520 with the output of the full-wave-rectifier circuit 540, and the first multiplier 550 outputs a first multiplied signal. The second multiplier 560 multiplies the PAM data of binary-to-PAM circuit 530 with the output
30 of full-wave-rectifier circuit 540, and the second multiplier 560 outputs a second multiplied signal. The first and second multiplied signals are signals that have a carrier frequency corresponding to the output of the full-wave-rectifier circuit 540.

35 The second multiplied signal is delayed by a delay circuit 570, where the delay corresponds to one-half

the symbol rate (in digital terms, $Z^{-T/2}$). Delay circuit 570 delays the signal in the Q channel so that it will be at a peak when the signal in the I channel is at a zero value. An adder 580 adds the output of the delay circuit 570 to the output of the first multiplier 550, where that output corresponds to a constant envelope MSK signal 590.

The constant envelope feature of MSK is shown in Figure 5, where each zero value of either the I or Q channel is matched in time by a peak value in the other channel. Values in between the peak and minimum values in each channel are matched in time with each other (due to a delay element provided in the Q channel) to maintain a constant envelope modulated signal (the sum of the I and Q channels) at all times.

The $\sin(\omega T/2)$ signal can be generated in a number of ways. One way is to use a sample counter as an index to a sine/cosine table. For example, in the preferred embodiment, the combined symbol rate upstream is 34000 Hz, and the sample rate is 272,000 Hz. Thus, there are 8 samples per symbol. The sample counter counts from 0 to 7 for each input symbol, and is used as an index to a sine/cosine lookup table. Figure 6A shows eight sample points for one pulse amplitude modulated (PAM) symbol corresponding to a "1" value, with each sample point corresponding to a particular sinusoidal value. If the PAM symbol corresponds to a "-1" value, then the eight sample points would have corresponding sinusoidal values as shown in Figure 6B.

In a first configuration of a sine/cosine lookup table, the sine/cosine lookup table has 2048 pairs of entries, where each entry has a corresponding sine value associated with it. The carrier delta Δ is used to access the appropriate entry in the lookup table. In a second configuration, a sample counter is used as an index to a lookup table that only contains a number of entries corresponding to twice the number of samples per symbol.

Thus, in the example described above, a lookup table having only sixteen pairs of entries would be used in the second configuration.

5 In the first configuration, each entry in the first column of the lookup table corresponds to a particular sample position of one positive cycle of a sinusoid, with entry 0 corresponding to a 0 degree position in the positive cycle of a sinusoid, and with entry 1023 corresponding to an 180 degree or π position in that one
10 cycle. Entries 1024 to 2047 correspond to sample positions of one negative cycle of the sinusoid, and correspond to positions between 180 degrees and 360 degrees of the sinusoid. The carrier delta Δ is used as an index to a lookup table.

15 The carrier delta Δ is computed according to the following equation:

$$\Delta = 2048 * (fc/fs) = 2048 * (fc/272,000),$$

wherein fc is the symbol rate for each channel, and fs is the sample rate.

20 In the system according to the invention, the symbol rate is 17000 Hz for each channel, and so the total bit rate output by the MSK modulator is 34000 bits/second, since there are two bits per symbol (i.e., an I bit and a Q bit for each symbol that is MSK modulated). Thus:

25 $\Delta = 2048 * (17000 / 272000) = 128.$

From this calculation, a half-wave sine table having the values as shown in Figure 7A is obtained, with the first column corresponding to an address location for each value in the lookup table, and with the second column
30 corresponding to the corresponding sine value (with the integer value 32767 corresponding to a sine value of just below "1"). Using the carrier Δ that increments by 128 for each sample of a symbol, the sine value corresponding to the zeroth location in the lookup table is retrieved for
35 the zeroth sample of a "+1" PAM symbol, the 128th location

in the lookup table is retrieved for the first sample of the "+1" PAM symbol, . . . , the 896th location in the lookup table is retrieved for the seventh sample of the "+1" PAM symbol. Either the zeroth location or the 1024th location in the lookup table is retrieved for the eighth sample, which corresponds to the zeroth sample of a next symbol. The zeroth location is retrieved if the next symbol is a "+1" PAM symbol, and the 1024th location is retrieved if the next symbol is a "-1" PAM symbol.

Thus, the zeroth sample for a "+1" PAM symbol in the I channel would map to the sine value of 0, the first sample for the "+1" PAM symbol in the I channel would map to the sine value of 12539, . . . , the fourth sample for the "+1" PAM symbol in the I channel would map to the sine value of 32767 (which equals $2^{16} - 1$, which corresponds to the largest number in a 16-bit integer range, which is a typical maximum integer value for a 16-bit computer), . . . , and the seventh sample for the "+1" PAM symbol in the I channel would map to the sine value of 12539. The next sample in the I channel would correspond to the zeroth sample for the next symbol in the I channel. Note that, due to the T/2 delay element in the path of the Q-channel, data corresponding to the fourth sample of the symbol in the I channel, which is at a peak output value, is added to a T/2-delayed value from the Q-channel, which would correspond to a zeroth sample for a symbol in the Q channel. This zeroth sample for the symbol in the Q-channel is obtained from a similar table to that shown in Figure 7A, where the corresponding sine value would be "0". Thus, the adder 590 would add a peak value from the I channel to a minimum value from the Q channel, which maintains the constant envelope feature of this modulation scheme.

Entries 1024 to 2047 of the sine table correspond to the corresponding sine values for a "-1" PAM output, and

entries 0 to 1023 of the sine table correspond to the corresponding sine values for a "+1" PAM output. Thus, for a "+1" PAM value, the 0th entry in the table is accessed for the first sample of that symbol, and every 128th entry is successively accessed for the next seven samples of that same symbol. For a "-1" PAM value, the 1024th entry in the table is accessed for the first sample of that symbol, and every 128th entry is successively accessed for the next seven samples of that same symbol.

10 In the second lookup table configuration, instead of having 2048 entries in the sine/cosine lookup table and then jumping by 128 addresses in the table for each sample, a smaller sine/cosine lookup table having only sixteen entries is used, as shown in Figure 7B. In Figure 7B, the sample counter is used to access the appropriate address location in the sine/cosine table, with the zeroth sample of a "+1" PAM symbol corresponding to a sample count = 0, which is used to retrieve the value 0 in the address = 0 location of the sine/cosine table. The first sample of the "+1" PAM symbol corresponds to a sample count = 1, which is used to retrieve the value "12539" in the address = 1 location of the sine/cosine table. After the sample count gets to 7, which corresponds to the eighth or last sample of the "+1" PAM symbol, the sample count resets to zero for a next symbol to be sampled. For a "-1" PAM symbol, the eighth through sixteen entries of the table are respectively accessed for the eight samples of that symbol.

Figure 8 shows a block diagram of a DSL modem 54A according to a first embodiment of the invention, and many components of the DSL modem 54A are not shown in order to simplify the explanation. Referring now to Figure 3, Figure 4 and Figure 8, a modulator 500 performs constant envelope modulation on data received from a computer 84. The constant-envelope-modulated data passes through band-pass filter 810, which has a response in accordance with the upstream DSL band. Band-pass filter 810 keeps signals

in all other bands from passing therethrough. Bandpass-pass filter 810 outputs a filtered signal on subscriber line 52.

Downstream signals are received on subscriber line 52, and pass through band-pass filter 820, which has a response in accordance with the downstream DSL band. Note that band-pass filter 810 blocks these downstream DSL signals from being sent to the modulator 500. Band-pass filter 820 outputs a filtered signal to demodulator 830. Demodulator 830 performs a demodulation on the downstream signals, and is preferably implemented as a quadrature amplitude demodulator (when the downstream signals are QAM signals).

Figure 9 shows a DSL modem 54B according to a second embodiment of the invention, in which an echo canceler 910 and other components are used.

It is understood that, while the detailed drawings and specific examples given describe preferred exemplary embodiments of the present invention, they are for the purpose of illustration only. The apparatus and method of the invention is not limited to the precise details and conditions disclosed. For example, although an DSL transmission scheme is shown with a POTS transmission scheme, other types of schemes may be utilized according to the teachings of the present invention for a splitterless telephone communication system. One such system would provide for simultaneous communication on telephone wires using both ADSL traffic and POTS traffic, where the upstream ADSL traffic uses constant envelope modulation to lessen the amount of interference to the POTS traffic.

Also, while the present invention is directed to a constant envelope scheme for upstream DSL signals sent from a house or remote location to a central office, the downlink DSL signals sent from a server, for example, and arriving at the house also may have constant envelope modulation so as to further reduce the amount of audible

noise heard by the telephones. However, the downlink signals have been attenuated by the telephone lines from the server (or other sending site) to the receiving site, and thus do not cause nearly as serious a problem as the
5 closely-located uplink signals that are output by a DSL modem located nearby the telephones.

Still further, while constant envelope modulation is described herein as a technique to lessen interference between signals in the ADSL band and signals in the POTS
10 band, other techniques, such as shaped envelope modulation may be utilized in order to lessen the noise heard by the demodulation of ADSL signals by the telephones. For example, by coding the upstream ADSL signal so that the spectrum of the amplitude portion of the modulation is
15 severely attenuated in the audio band (which includes the POTS band), a QAM or other modulation technique may be used which will still keep demodulated components from being heard at the telephones. A phase modulated portion of the signal is not affected, since intermodulation products due
20 to pure phase modulation do not translate to baseband.

CLAIMS

- 1 1. A digital subscriber line modem adapted to be
2 coupled directly to a subscriber line, the modem being
3 capable of simultaneous access to the subscriber line with
4 other telephone equipment operating in a first frequency
5 band, the modem comprising:
6 a terminal for coupling to the subscriber line;
7 and
8 a modulator connected to the terminal, the
9 modulator configured to provide a constant envelope
10 modulation for a signal, the signal being transmitted over
11 the subscriber line in a second frequency band greater than
12 the first frequency band.
- 1 2. The digital subscriber line modem according
2 to claim 1, wherein the first frequency band is less than
3 or equal to 4 kilohertz.
- 1 3. The digital subscriber line modem according
2 to claim 1, wherein an amount of intermodulation product
3 distortion in the first frequency band is maintained below
4 a predetermined value, the amount being caused by the
5 signal in the second frequency band interacting with a non-
6 linearity in the telephone equipment.
- 1 4. The digital subscriber line modem according
2 to claim 3, wherein the signal in the second frequency band
3 has a plurality of different frequency components having
4 different amplitudes, wherein the corresponding amplitudes
5 of at least two of the different frequency components
6 interact with each other due to the non-linearity in the
7 telephone circuit to create at least one difference signal
8 in the first frequency band.

1 5. The digital subscriber line modem according
2 to claim 1, wherein the signal with constant envelope
3 modulation is an DSL signal.

1 6. The digital subscriber line modem according
2 to claim 1, wherein the signal with constant envelope
3 modulation is an ADSL signal.

1 7. The digital subscriber line modem according
2 to claim 1, wherein the constant envelope modulation is an
3 m-ary frequency shift keying modulation, where m is an
4 integer.

1 8. The digital subscriber line modem according
2 to claim 1, wherein the constant envelope modulation is an
3 m-ary phase shift keying modulation, where m is an integer.

1 9. The digital subscriber line modem according
2 to claim 1, wherein the constant envelope modulation is an
3 minimum shift keying modulation.

1 10. A telephone communication system includes a
2 subscriber line between a telephone central office and a
3 remote location, the remote location being capable of
4 transmitting and receiving both POTS signals within a first
5 frequency band and DSL signals within a second frequency
6 band over the subscriber line at the same time without
7 using a splitter at the remote location, the system
8 comprising:

9 a modulator connected to the subscriber line, the
10 modulator configured to provide a constant envelope
11 modulation for the DSL signals, the DSL signals being
12 transmitted over the subscriber line in the second
13 frequency band so as to lessen an amount of interference
14 with the POTS signals created due to non-linearities

15 causing demodulation of the DSL signals into the first
16 frequency band.

1 11. The system according to claim 10, wherein
2 the first frequency band is less than or equal to 4
3 kilohertz.

1 12. The system according to claim 10, wherein an
2 amount of intermodulation product distortion that is caused
3 as a result of the demodulation of the DSL signals into the
4 first frequency band is maintained below a predetermined
5 value.

1 13. The system according to claim 12, wherein
2 the signal in the second frequency band has a plurality of
3 different frequency components having different amplitudes,
4 wherein the corresponding amplitudes of at least two of the
5 different frequency components interact with each other due
6 to the non-linearities to create at least one difference
7 signal in the first frequency band.

1 14. The system according to claim 10, wherein
2 the signal that is transmitted over the subscriber line
3 with constant envelope modulation is a DSL signal.

1 15. The system according to claim 10, wherein
2 the signal that is transmitted over the subscriber line
3 with constant envelope modulation is an ADSL signal.

1 16. The system according to claim 10, wherein
2 the constant envelope modulation is an m-ary frequency
3 shift keying modulation, where m is an integer.

1 17. The system according to claim 10, wherein
2 the constant envelope modulation is an m-ary phase shift
3 keying modulation, where m is an integer.

1 18. The system according to claim 10, wherein
2 the constant envelope modulation is an minimum shift keying
3 modulation.

1 19. A method of providing simultaneous
2 communication over a telephone subscriber line, the
3 simultaneous communication including at least a first
4 signal in a first frequency band that is either being sent
5 to or received from a telephone, and a second signal in a
6 second frequency band that is higher than the first
7 frequency band, the second signal being sent from a modem,
8 the method comprising the step of:

9 providing, by the modem, a constant envelope
10 modulation for the second signal in the second frequency
11 band,

12 wherein the constant envelope modulation limits
13 an amount of audible noise heard at the telephone, the
14 audible noise being due to a nonlinearity in the telephone
15 that demodulates the second signal into the first frequency
16 band.

1 20. The method according to claim 19, wherein
2 the first frequency band is less than or equal to 4
3 kilohertz.

1 21. The method according to claim 19, wherein an
2 amount of intermodulation product distortion in the first
3 frequency band that is caused as a result of the signal in
4 the second frequency band interacting with the non-
5 linearity in the telephone equipment is maintained below a
6 fixed value.

1 22. The method according to claim 21, wherein
2 the signal in the second frequency band has a plurality of
3 different frequency components having different amplitudes,
4 wherein the corresponding amplitudes of at least two of the

5 different frequency components interact with each other due
6 to the non-linearity in the telephone circuit to create at
7 least one difference signal in the first frequency band.


1 23. The method according to claim 19, wherein
2 the signal that is transmitted over the subscriber line
3 with constant envelope modulation is a DSL signal.

1 24. The method according to claim 19, wherein
2 the signal that is transmitted over the subscriber line
3 with constant envelope modulation is an ADSL signal.

1 25. The method according to claim 19, wherein
2 the constant envelope modulation is an m-ary frequency
3 shift keying modulation, where m is an integer.

1 26. The method according to claim 19, wherein
2 the constant envelope modulation is an m-ary phase shift
3 keying modulation, where m is an integer.

1 27. The method according to claim 19, wherein
2 the constant envelope modulation is an minimum shift keying
3 modulation.

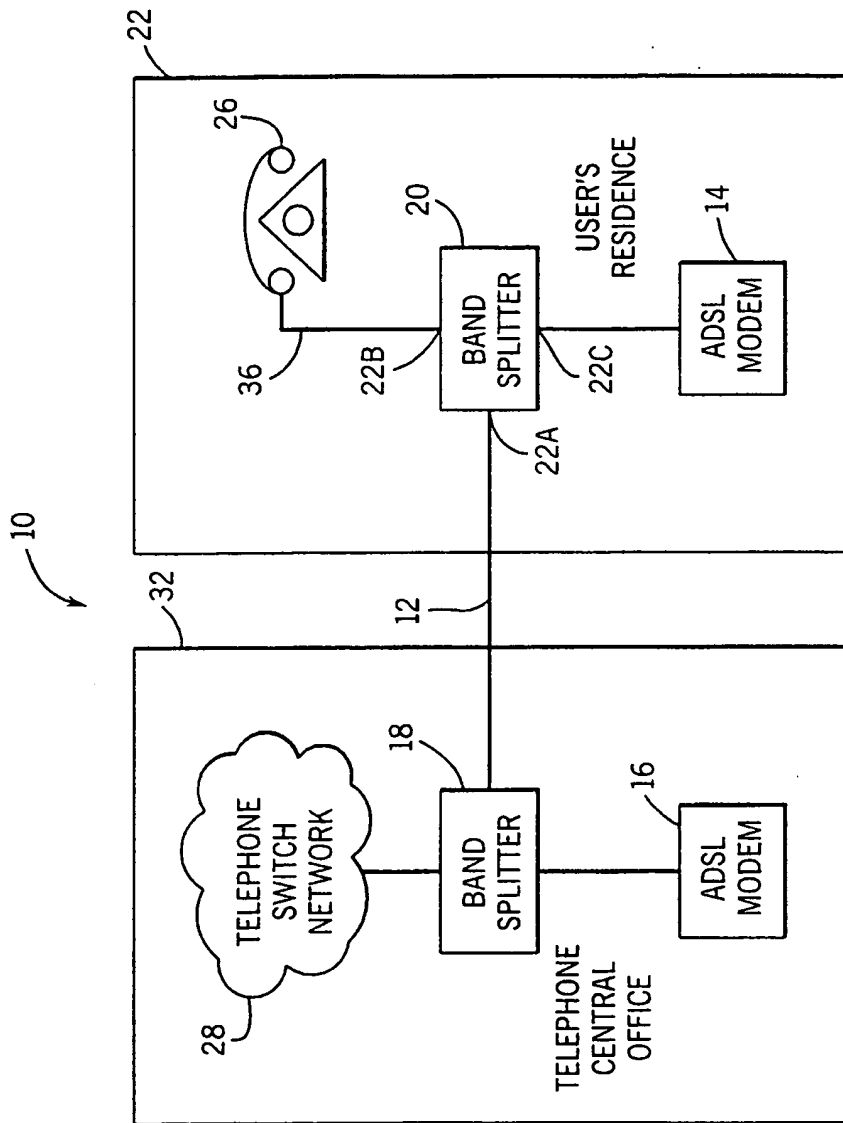

(PRIOR ART)

FIG. 1

2 / 6

FIG. 2

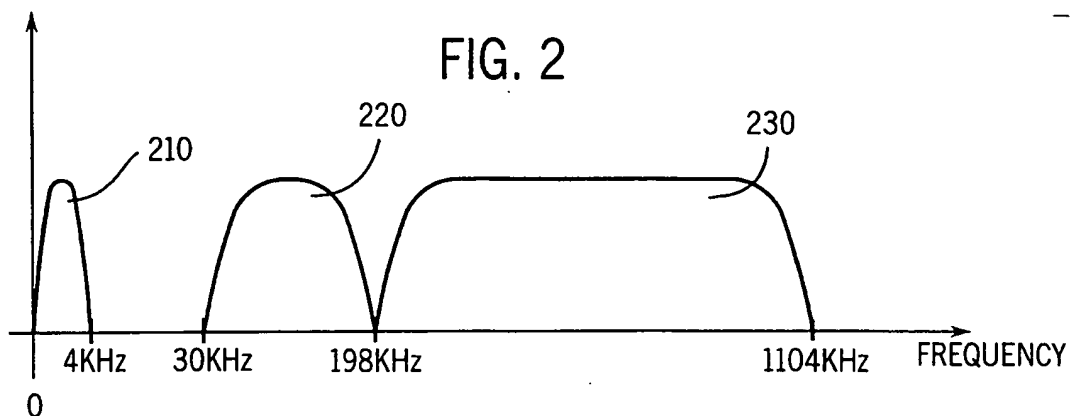


FIG. 4



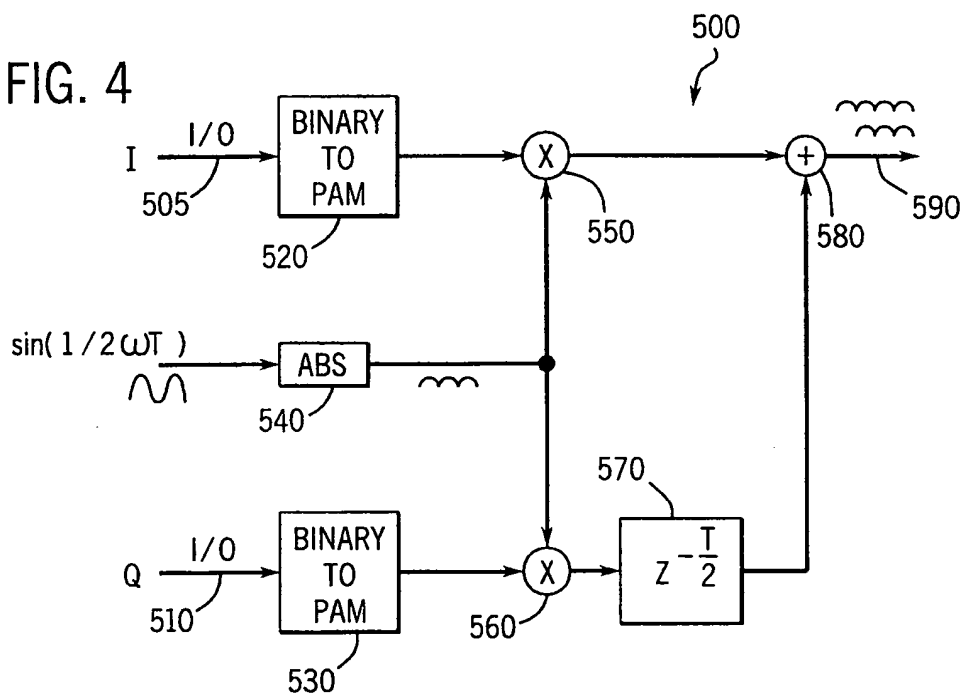


FIG. 5

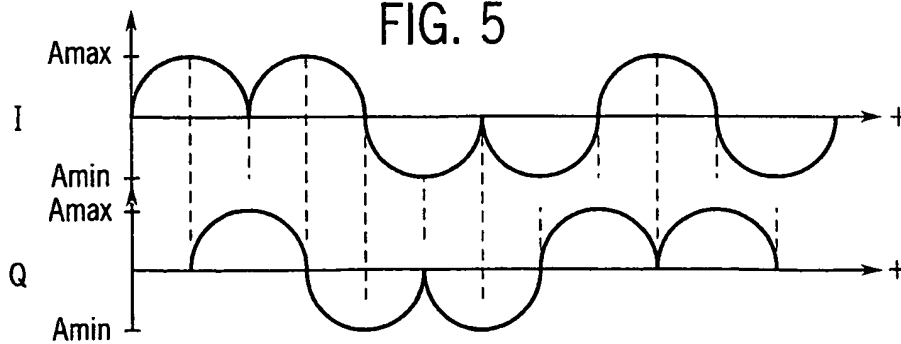

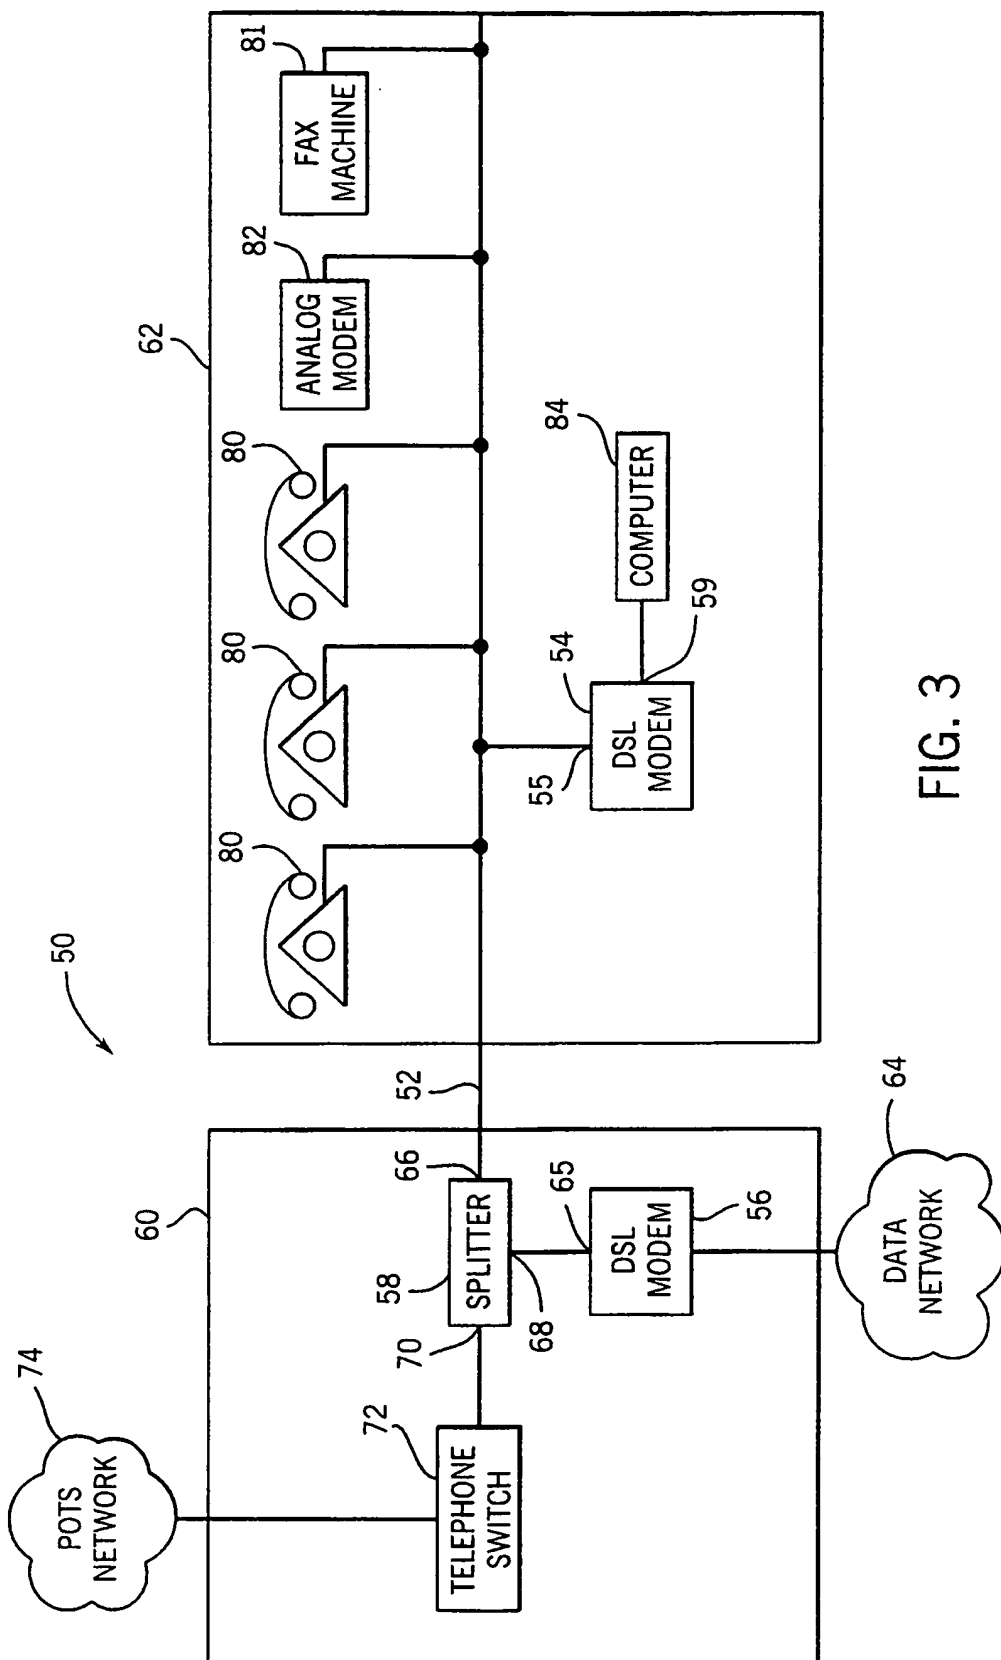

4 / 6

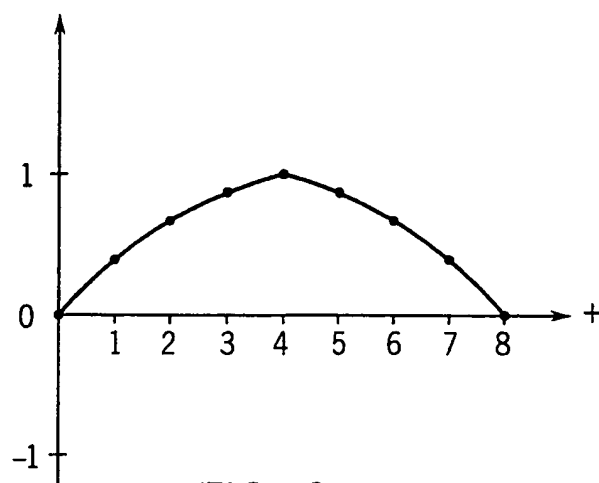


FIG. 6A

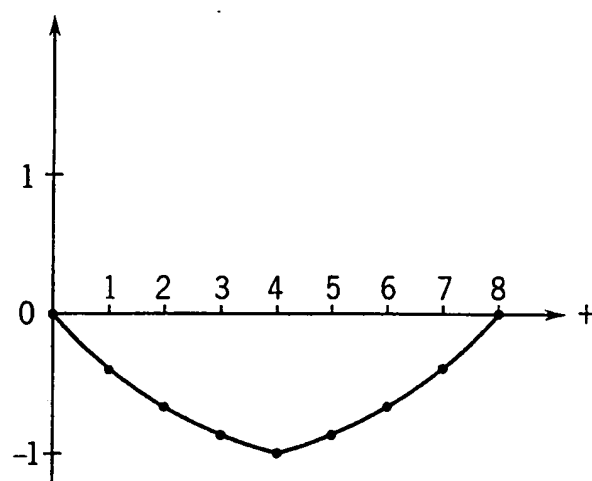


FIG. 6B

FIG. 7A

INDEX	VALUE
0	0
1	1
2	2
⋮	⋮
127	12534
128	12539
129	12544
⋮	⋮
255	23165
256	23170
257	23175
⋮	⋮
511	32762
512	32767
513	32762
⋮	⋮
2047	0

FIG. 7B

INDEX	VALUE
0	0
1	12539
2	23170
3	30273
4	32767
5	30273
6	23170
7	12539
8	0
9	-12539
⋮	⋮
15	-12539

6 / 6

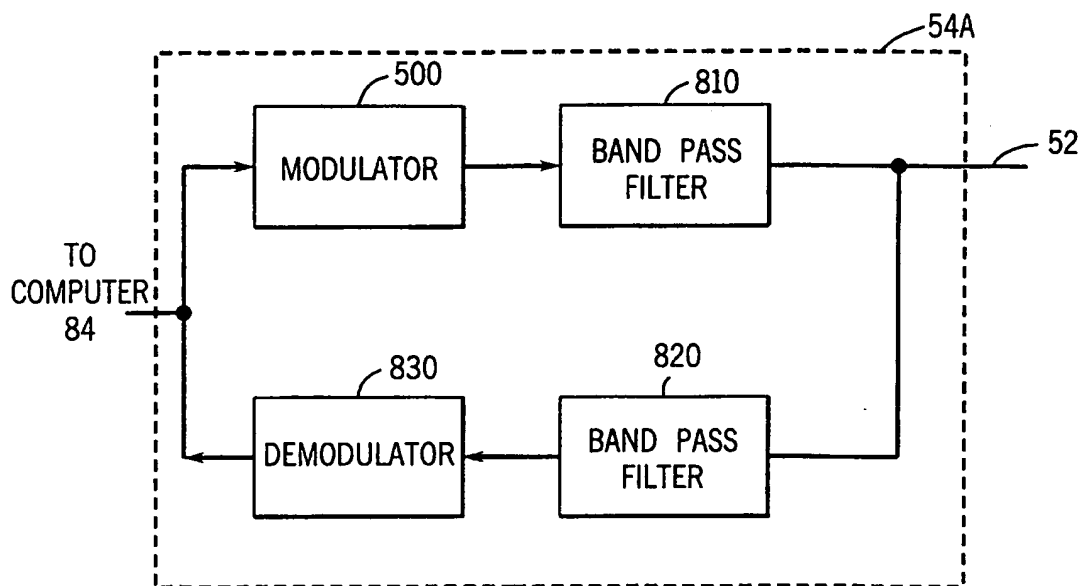


FIG. 8

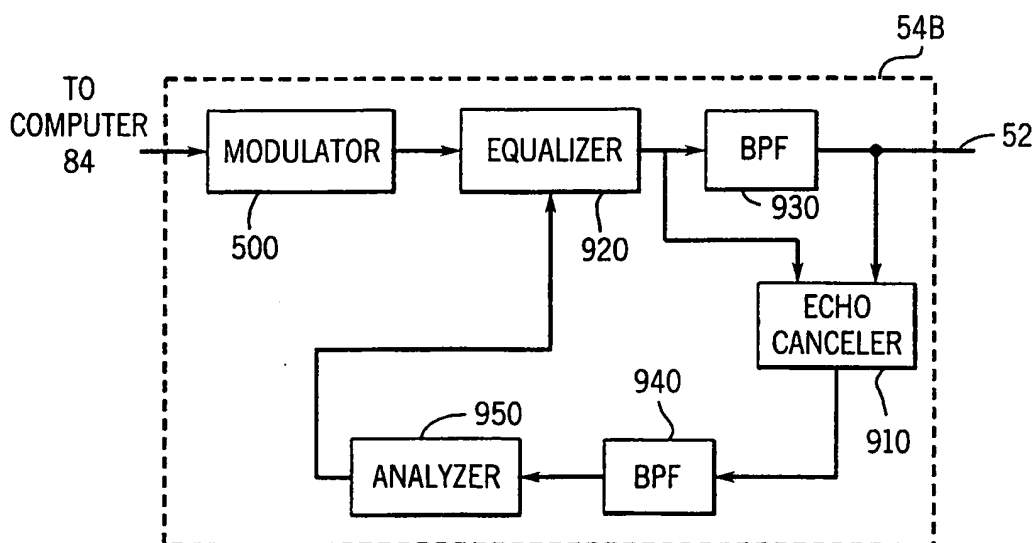


FIG. 9

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 98/25259

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04M11/06 H04L5/06 H04L27/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MORGAN H: "TWO-WIRE FULL-DUPLEX MODEM SIMPLIFIES VOICE AND DATA NETWORKING" MINI MICRO SYSTEMS., vol. 17, no. 3, March 1984, pages 184-186, 188, XP002097437 BOSTON US see the whole document	1-3, 7, 8, 19-21, 25, 26
Y	---	4-6, 9-18, 22-24, 27
	-/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

22 March 1999

Date of mailing of the international search report

07/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mikkelsen, C

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 98/25259

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>WULICH D ET AL: "DATA OVER VOICE USING TIME-WARPING TECHNIQUE" SIGNAL PROCESSING EUROPEAN JOURNAL DEVOTED TO THE METHODS AND APPLICATIONS OF SIGNAL PROCESSING, vol. 34, no. 1, 1 October 1993, pages 99-108, XP000435705 see abstract see paragraph 1.</p> <p style="text-align: center;">---</p>	9, 18, 27
Y	<p>EP 0 820 168 A (TEXAS INSTRUMENTS INC) 21 January 1998</p> <p>see abstract see page 7, line 4-7 see page 7, line 45-49</p> <p style="text-align: center;">-----</p>	4-6, 10-17, 22-24

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 98/25259

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0820168 A	21-01-1998	JP 10154949 A	09-06-1998